


THESE PINS MUST BE ADDED!

PIN #1 OF RT-BGA ADAPTER

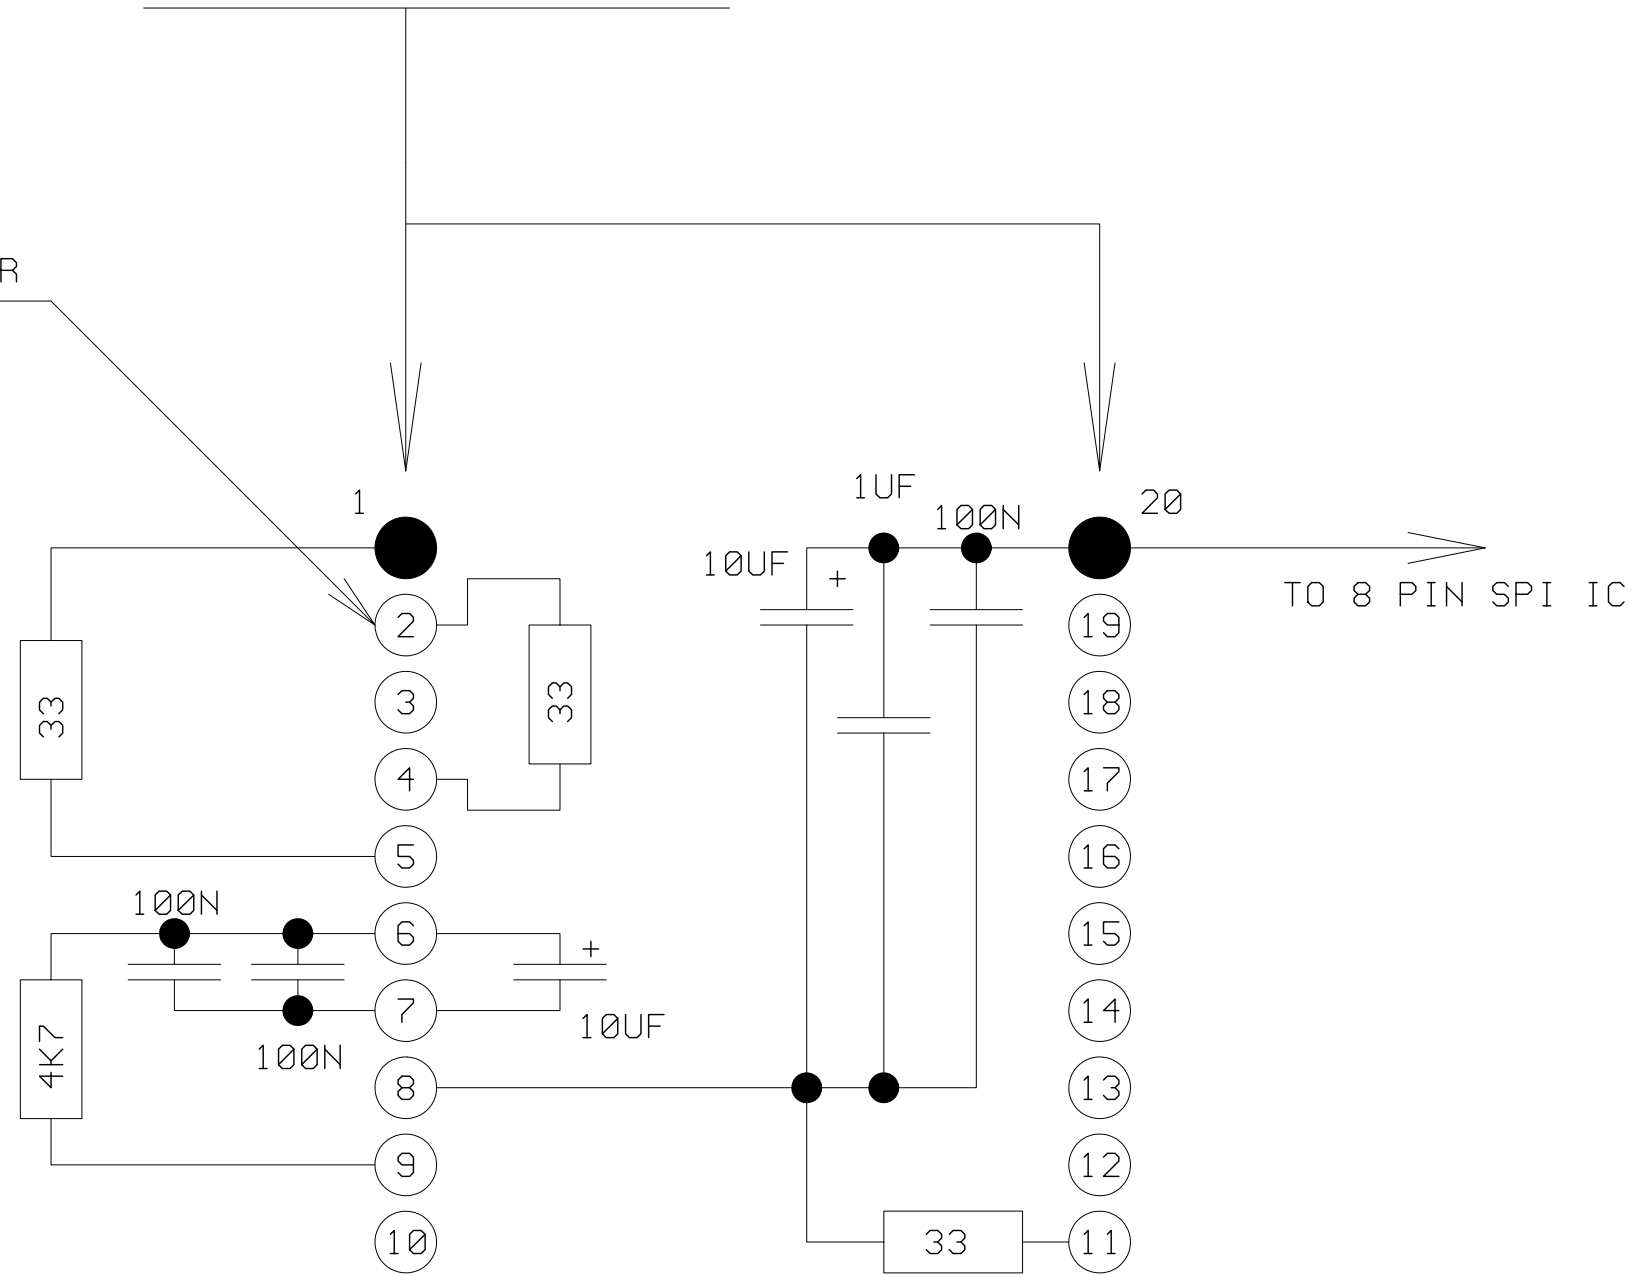

- 1 - ADAPTER IDENT (?)
- 2 - (?)
- 3 - RST_N
- 4 - (?)
- 5 - (?)
- 6 - VCCQ
- 7 - VSSQ
- 8 - VSS
- 9 - CMD
- 10 - CLK
- 11 - (?)
- 12 - DAT7
- 13 - DAT2
- 14 - DAT1
- 15 - DAT0
- 16 - DAT4
- 17 - DAT3
- 18 - DAT5
- 19 - DAT6
- 20 - VCC

PIN #5 MUST BE CUTTED FROM THE NODE OF RT-BGA ADAPTER!

NOTICE: ALL CERAMIC CAPACITORS MUST BE PLACED ON BOTTOM SIDE AS CLOSE AS POSSIBLE TO BGA ADAPTER AREA!

SPI FLASH MUST BE REMOVED